



# LDP 24-100 (25.6V 100Ah)

lithium iron phosphate (LiFePO4) battery

**Your best power choice  
for energy storage system!**



EverExceed LiFePO4 solutions are more advanced, highly efficient and has many advantages over the traditional Lead Acid technology.

Here introducing popular LDP 24-100 battery of EverExceed which is high demanding among different industry users for its most advanced features.

## Application

- Wheel chair, sweeper, electric vehicle, robot
- Solar/wind energy storage system
- UPS Backup power
- Telecommunication
- Medical equipment
- Solar Street light

## Advantage summary

- Direct Lead Acid Battery (AGM/GEL) replacement for 100AH;
- Faster charge, 1 hour of charging can provide up to 90% charge (Optional);
- High energy density and conversion efficiency;
- Environmental Friendly, without any heavy metals;
- High cycle times and longer service life of >3000 cycles @100% DOD;
- Great high temperature performance;
- Safety in use: Advanced intelligent BMS inside, No explosion, No fire;
- Ultra low self discharge rate <1.5%/month;
- No maintenance required through out the lifetime;
- Great power saver;
- Superior DOD (100%) over lead acid batteries;
- No acid splash and carbon mono-oxide emission so no need expensive battery maintenance room;
- The integrated BMS can support Bluetooth connectivity with dedicated user friendly app to ease your operation and monitoring (optional);





### ELECTRICAL SPECIFICATIONS

Nominal Voltage	25.6 V
Nominal Capacity	100 Ah
Energy	2560 Wh
Resistance	≤50 mΩ
Self Discharge	<1.5% per Month
Maximum Modules in Series	Up to 2S (51.2V)

### CHARGE SPECIFICATIONS

Recommended Charge Current	50 A
Maximum Charge Current	100 A
Recommended Charge Voltage	28.4 V-29.2 V
BMS Charge Voltage Cut-Off	29.2 V (3.65 ±0.5 vpc) (1.1 ±0.4 s)
Reconnect Voltage	28.8 V (3.6 ±0.05 vpc)
Charging method	CC-CV

### DISCHARGE SPECIFICATIONS

Maximum Continuous Discharge Current	100 A
Peak Discharge Current	200 A (<2S)
Recommended Low Voltage Disconnect	22 V (2.75 vpc)
BMS Discharge Voltage Cut-Off	16 V (2.0 ±0.08 vpc) (20 ±6 ms)
Reconnect Voltage	20 V (2.5 ±0.05 vpc)
Short Circuit Protection	200-600 μs


### TEMPERATURE SPECIFICATIONS

Discharge Temperature	- 4 °F to 140 °F (-20°C to 60 °C)
Charge Temperature	32 °F to 122 °F (0 °C to 50 °C)
Recommend Storage Temperature	23°F to 95 °F (-5°C to 35 °C)

### MECHANICAL SPECIFICATIONS

Dimensions (L x W x H)	20.6 x 9.4 x 8.7 "
	522 x 240 x 220 mm
Weight	25.5 Kg
Terminal Type	M8
Case Material	ABS
Enclosure Protection	IP55


### DIMENSIONAL SPECIFICATIONS

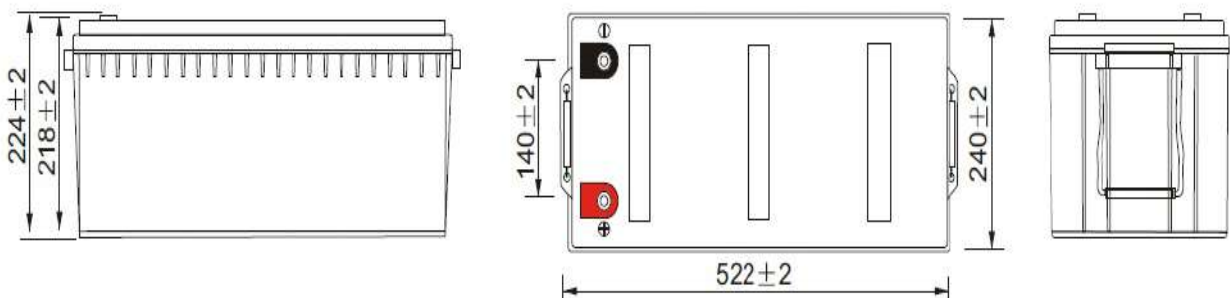




## Performance curve


Different Rate Discharge Curve @25°C

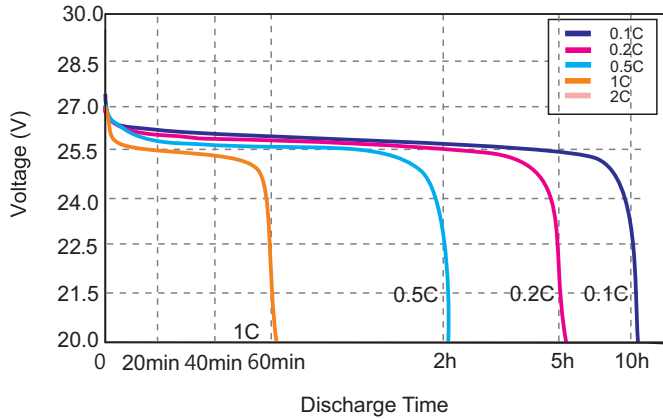


Different Temperature Discharge Curve @0.5C

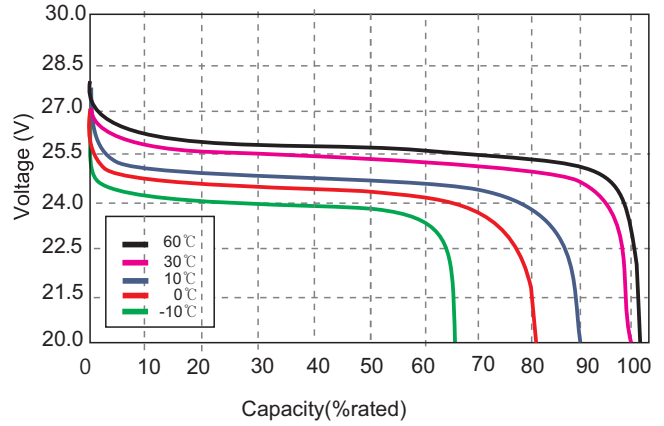


State of Charge Curve @0.5C 25°C

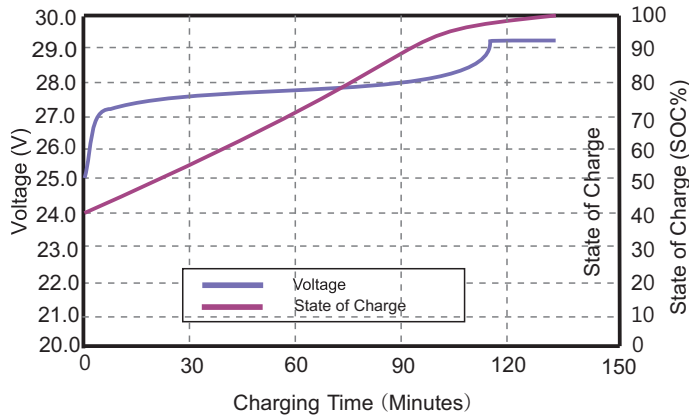

Charging Characteristics @0.5C 25°C

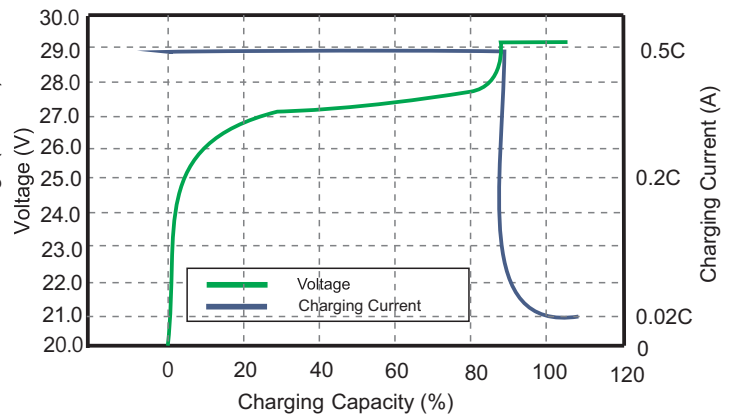

Different DOD Discharge Cycle life Curve @0.2C 25°C

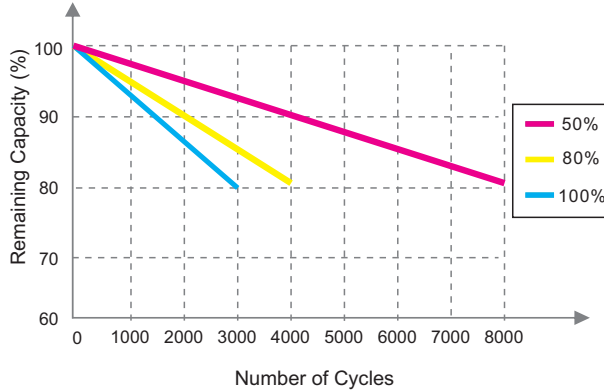

Different Temperature Self Discharge Curve

